



University of
Salford
MANCHESTER

White light lasers

Rose, CS, McDonald, GS and Christian, JM

Title	White light lasers
Authors	Rose, CS, McDonald, GS and Christian, JM
Publication title	
Publisher	
Type	Conference or Workshop Item
USIR URL	This version is available at: http://usir.salford.ac.uk/id/eprint/18444/
Published Date	2010

USIR is a digital collection of the research output of the University of Salford. Where copyright permits, full text material held in the repository is made freely available online and can be read, downloaded and copied for non-commercial private study or research purposes. Please check the manuscript for any further copyright restrictions.

For more information, including our policy and submission procedure, please contact the Repository Team at: library-research@salford.ac.uk.

White Light Lasers

C S Rose, G S McDonald and J M Christian

Materials & Physics Research Centre, University of Salford, UK

Broadband multiline frequency combs present a wealth of applications, ranging from meteorology, sensing and measurements to those potentially in the domain of attosecond science. We report here on detailed investigations of a novel process that is accompanied by extreme enhancement of the bandwidth of the generated frequencies – resulting in a *novel white light laser source*. Cavity contexts where efficient broadband multiline generation have been reported include spherical micro-cavities [1], monolithic micro-resonators [2] and so-called ‘bottle micro-resonators’ [3], in which the cavity quality to mode volume ratio (Q/V) plays a dominant role in the characteristics of the device and its constituent whispering gallery modes. Typically, maximum quality and low volume lead to the optimal condition of high Q/V . To illustrate distinctiveness from these well-known contexts, we stress that the effects we report can be optimal in either low- Q resonators (with very moderate reflectivities) or larger volume cavities (e.g. with longer cavity lengths) – see Figure 1.

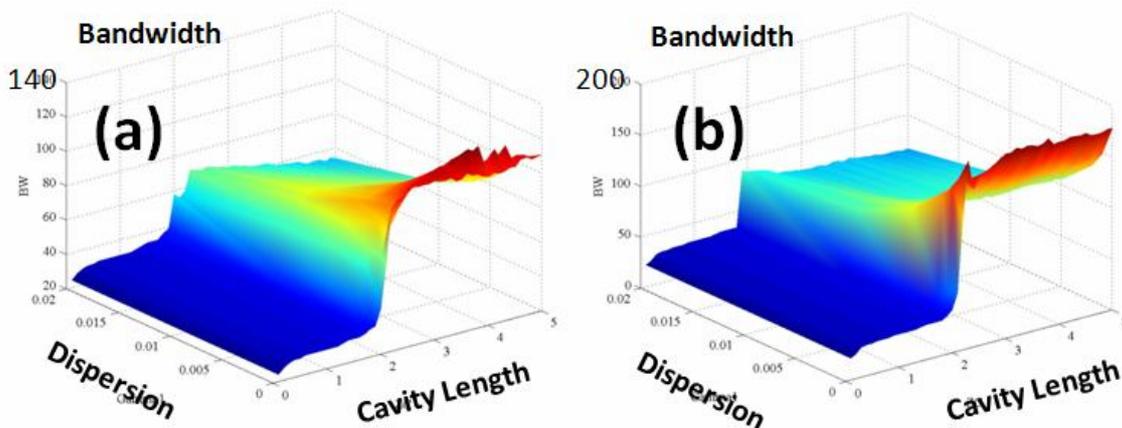


Figure 1: Surface plots showing bandwidths consisting of well in excess of 100 distinct frequencies. Dependencies on levels of dispersion and cavity length are explored. (a) Bandwidth generated with moderate cavity reflectivity 0.93. (b) Higher bandwidth generated at lower reflectivity (*lower Q/V*).

References

- [1] Spillane S M, Kippenberg T J and Vahala K J, *Nature* **415**, 621 (2002).
- [2] Del’Haye P *et al*, *Nature* **450**, 1214 (2007).
- [3] Pollinger M *et al*, *Phys. Rev. Lett.* **103**, 053901 (2009).